

BOLLARD - REMOVABLE PMD:BLD-1R

PROMENADE
RANGE



INSTALLATION OPTIONS AND DIMENSIONS

Below ground bolt-fix 220mm Diameter x 1200mm H

Below ground in-situ poured concrete. 220mm Diameter x 1450mm H

REMOVABLE OPERATION

The tube projecting from the underside of the bollard sleeves into the separate in-ground base assembly. When the bollard is removed, the hinged hasp for the padlock covers the rectangular hole in the paving.

Padlock is not included.

MATERIAL OPTIONS AND FINISH

Bollard - Aluminium with powder coat finish, or hot-dipped galvanised steel with powder coat finish.


In-Ground Base Assembly - Exposed hot-dipped galvanised steel.

OPTIONAL INSERT

The bollard can be supplied with or without a decorative cast insert. Standard insert is 'Gunmetal Grey' with an exposed aggregate finish. The colour can be customised to compliment the surrounding paving.

DECORATIVE USE ONLY

This bollard is not designed as a security barrier to protect people or property from vehicle impact and must not be used for this purpose.

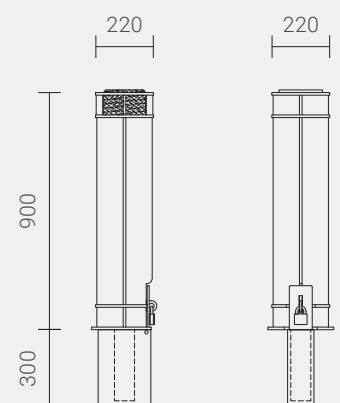

Designed by
Cox Urban Furniture
info@coxurbanfurniture.com.au
coxurbanfurniture.com.au

Distributed by Altiform,
National Sales Hotline
T. 1800 2584 3676
sales@altiform.com.au

Copyright © 2018 Cox Urban Furniture.

Not to be reproduced in any form
without prior written consent.