

BOLLARD - REMOVABLE PMD:BLD-2R

PROMENADE
RANGE



INSTALLATION OPTIONS AND DIMENSIONS

Below ground bolt-fix	220mm Diameter x 1200mm H
Below ground in-situ poured concrete.	220mm Diameter x 1450mm H

REMOVABLE OPERATION

The tube projecting from the underside of the bollard sleeves into the separate in-ground base assembly. When the bollard is removed, the hinged hasp for the padlock covers the rectangular hole in the paving.

Padlock is not included.


MATERIAL OPTIONS AND FINISH

Bollard - Aluminium with powder coat finish, or hot-dipped galvanised steel with powder coat finish.

In-Ground Base Assembly - Exposed hot-dipped galvanised steel.

OPTIONAL INSERT

The bollard can be supplied with or without a decorative cast insert. Standard insert is 'Gunmetal Grey' with an exposed aggregate finish. The colour can be customised to compliment the surrounding paving.

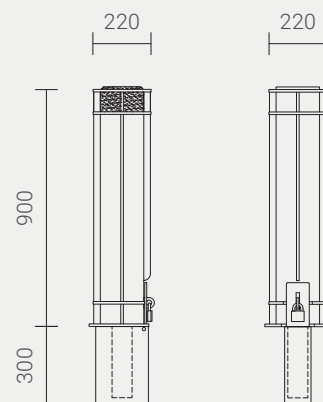

Designed by
Cox Urban Furniture
info@coxurbanfurniture.com.au
coxurbanfurniture.com.au

Distributed by Altiform,
National Sales Hotline
T. 1800 2584 3676
sales@altiform.com.au

Copyright © 2018 Cox Urban Furniture.

Not to be reproduced in any form
without prior written consent.